


STING HPC

STEREO

FRITZZ

Rahmengröße	16"	18"	20"	22"	16"	18"	20"	22"	16"	18"	20"
Sitzrohr [mm] A	410	460	500	535	400	450	490	535	410	460	500
Sitzrohr Mitte-Mitte [mm] A'	320	370	420	470	305	355	405	455	310	365	415
Oberrohr [mm] B	529	540	551	562	514	533	544	558	517	538	557
Oberrohr horizontal [mm] B'	570	590	605	615	560	585	598	610	564	590	610
Sitzwinkel [Grad] C	74	74	74	74	74	74	74	74	74	74	74
Steuerrohrwinkel [Grad] D	69,5	69,5	69,5	69,5	68	68	68	68	67	67	67
Kettenstreben [mm] E	428	428	428	428	430	430	430	430	430	430	430
Federweg Hinterbau [mm] F	120	120	120	120	140	140	140	140	160	160	160
Steuerrohr [mm] G	120	130	140	150	120	130	140	150	120	130	140
Radstand [mm] H	1104	1117	1130	1143	1110	1134	1147	1159	1131	1156	1176
Tretlagerhöhe zur Nabenachse [mm] I	-20	-20	-20	-20	-7	-7	-7	-7	+5	+5	+5
Überstandshöhe ca. [mm] J	729	775	825	860	729	775	825	860	750	800	850
Rahmenset *	X	X	X	X	X	X	X	X	X	X	X

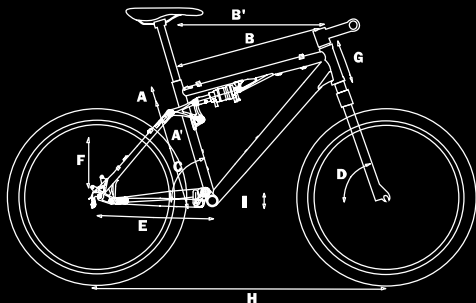

Modell

AMS HPC

AMS PRO

AMS 125

Rahmengröße	16"	18"	20"	22"	16"	18"	20"	22"	16"	18"	20"	22"
Sitzrohr [mm] A	406	457	508	559	406	457	508	559	426	457	508	559
Sitzrohr Mitte-Mitte [mm] A'	346	392	438	438	346	392	438	438	348	394	439	439
Oberrohr [mm] B	541	565	584	591	541	565	584	591	541	558	580	587
Oberrohr horizontal [mm] B'	561	588	605	613	561	588	605	613	561	583	605	613
Sitzwinkel [Grad] C	73,5	73,5	73,5	73,5	73,5	73,5	73,5	73,5	72,5	72,5	72,5	72,5
Steuerrohrwinkel [Grad] D	70,5	70,5	70,5	70,5	70,5	70,5	70,5	70,5	69	69	69	69
Kettenstreben [mm] E	425	425	425	425	425	425	425	425	430	430	430	430
Federweg Hinterbau [mm] F	100	100	100	100	100	100	100	100	130	130	130	130
Steuerrohr [mm] G	130	140	150	160	130	140	150	160	130	140	150	160
Radstand [mm] H	1054	1082	1099	1108	1054	1082	1099	1108	1073	1096	1119	1127
Tretlagerhöhe zur Nabenachse [mm] I	-12	-12	-12	-12	-12	-12	-12	-12	0	0	0	0
Rahmenset *	X	X	X	X	X	X	X	X	X	X	X	X

Modell

AMS COMP

XMS

Rahmengröße	16"	18"	20"	22"	16"	18"	20"	22"
Sitzrohr [mm] A	406	457	508	559	406	457	508	559
Sitzrohr Mitte-Mitte [mm] A'	346	392	438	438	356	407	458	509
Oberrohr [mm] B	541	565	584	591	540	560	580	600
Oberrohr horizontal [mm] B'	561	588	605	613	561	583	600	614
Sitzwinkel [Grad] C	73,5	73,5	73,5	73,5	73,5	73,5	73,5	73,5
Steuerrohrwinkel [Grad] D	70,5	70,5	70,5	70,5	70,5	70,5	70,5	70,5
Kettenstreben [mm] E	425	425	425	425	425	425	425	425
Federweg Hinterbau [mm] F	100	100	100	100	100	100	100	100
Steuerrohr [mm] G	130	140	150	160	130	140	150	160
Radstand [mm] H	1054	1082	1099	1108	1054	1077	1095	1109
Tretlagerhöhe zur Nabenachse [mm] I	-12	-12	-12	-12	-12	-12	-12	-12
Rahmenset *	X	X	X	X				

* Rahmenset bestehend aus Rahmen, Steuersatz, Sattelklemme, Sattelstütze und Dämpfer